



# 4.0 LITER | 6.0 LITER COFFEE BREWING SYSTEM

## CBS-2111XTS MULTI-TEMPERATURE SERIES

Brew any kind of coffee with the CBS-2111XTS Multi-Temperature, Multi-Beverage 4.0/6.0 Liter Brewer from FETCO. Individually program up to 8 recipes and temperatures ranging from 80°C to 97°C to provide the ultimate versatility in hot brewing solutions.




**CBS-2111XTS**  
Single Station Coffee Brewer\*



**Multi-Temperature Versatility**  
Each one of the 8 batches can be programmed with its own temperature ranging between 80°C to 97°C.



**Touchscreen Simplicity**  
A simple touch is all it takes to experience full control over the brewing cycle.



**Pulse Brew System**  
Delivers intermittent pulses of water to ensure even saturation of the coffee bed for enhanced extraction.



**Compact Design and Powerful Output**  
This compact unit packs a larger tank and higher electrical configuration to maximize recovery and extend brewing cycles.

\* Shown with L4S-10 (Sold separately.)




# CBS-2111XTS 4.0 Liter / 6.0 Liter Coffee Brewer

The CBS-2111XTS is a multi-temperature, multi-beverage solution that provides the versatility to brew coffee at different temperatures in the same unit. Ideal for any kind of coffee roasts that requires a specific brewing temperature.

## Multi-Temperature Versatility

Each of the eight batches can be programmed with its own temperature from 80°C to 97°C. The tank holds the water temperature at the lowest of the 8 settings. Once a higher brewing temperature is selected, the tank will quickly heat the water in the tank and the CBS-2111XTS will brew the next batch. If a lower temperature is selected, then the operator has two choices besides waiting for the water temperature in the tank to cool down:

- 1 ▶ Dispense water from the side manual faucet.
- 2 ▶ Dispense water from the “dispense” button on the front panel into a dispenser until the desired (lower) temperature is reached.



## Revolutionary Cascading Spray Dome®

Exclusive to FETCO®! This unique, patented feature provides even saturation of the coffee bed for maximum flavor and aroma extraction. It resists lime build up which means fewer service calls and more time producing revenue.

## Updated Software with Translation-Free Functionality

The newly written software has been developed on the basis of numbers instead of letters, giving the ability to be used anywhere in the world without the need for translations or specific operator re-training.







## Lower Profile, Bigger tank, Higher Electrical Configuration

- ▼ The overall height of the unit is lower than its relative iced tea brewer CBS-2111 XTS, making it the perfect fit for tight counter spaces. The bigger and higher positioned tank provides a higher flow rate and increased stability to optimize efficiency.



## Two Dispenser Sizes Offers Even More Flexibility

- ▼ Use either a 4.0L LUXUS® L4S-10 or 6.0L LUXUS® L4S-15 (sold separately) to always have the right volume of fresh coffee.



## Hot Water Faucet (One Kit Included), with Optional Installation

- ▼ The hot water faucet kit is included in the unit and you can choose to install it on either side of the CBS-2111XTS upper body for the operator to depending on the application.



## Water Specification

<b>Water Inlet</b> 3/8" Male Flare Fitting	<b>Minimum Flow Rate</b> 5.7 lpm	<b>Water Pressure</b> 45-75 psig [310-517 kPa]
---	-------------------------------------	---


## Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Liter/Hour
INTERNATIONAL C211191	1 x 3.0 kW	200-240	1	2+G	3.1	Cord & Plug <sup>(2)</sup>	10.8-12.9	30.0 <sup>(1)</sup>

(1) Based on standard factory settings: 6 minute brew time; 0% prewet; 90°C water.  
 (2) Sold with factory cord & plug.

## Measurements

Model	Height	Depth	Width (NO hot water faucet)	Width (1 hot water faucet)	Width (2 hot water faucets)	Empty Weight	Filled Weight
CBS-2111XTS	73.7 cm	53.3 cm	22.9 cm	29.2 cm	35.6 cm	14.4 kg	48.3 kg

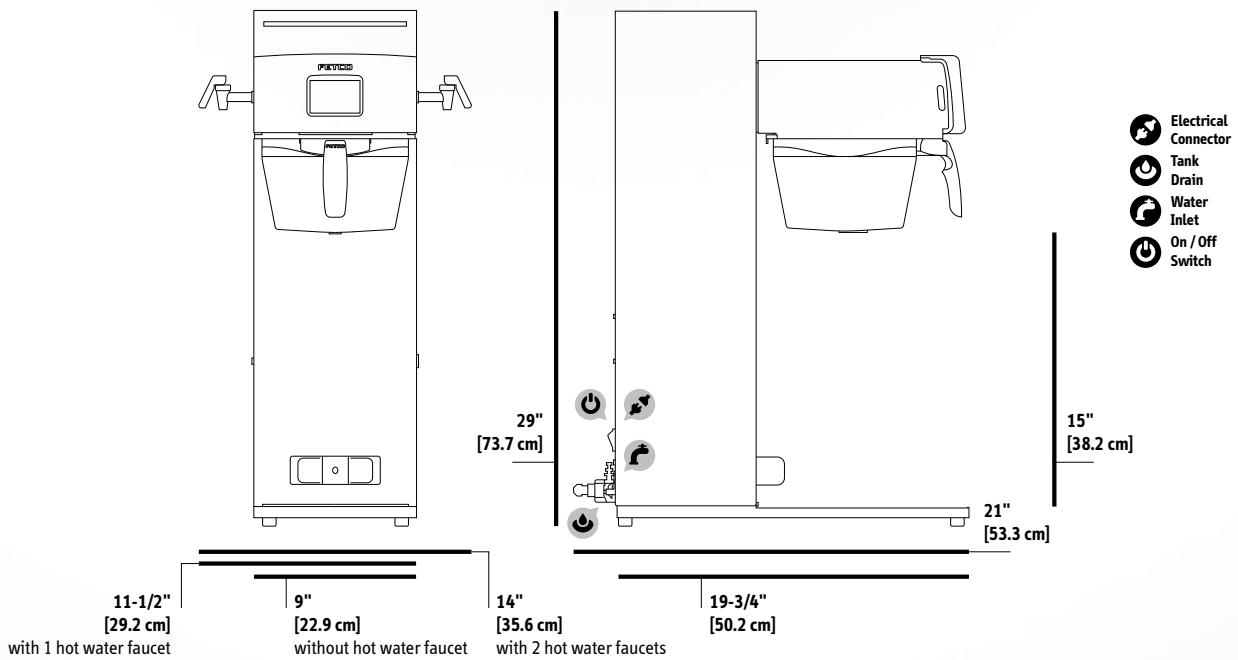

## Compatible Dispensers

#D451\*  
L4S-10  
4.0 Liter LUXUS®  
Thermal Server

Product Dimensions  
Height: 33.8 cm  
Width: 20.3 cm  
Depth: 26.0 cm

Empty / Filled Weight  
2.5 kg / 5.6 kg



#D452\*  
L4S-15  
4.0 Liter LUXUS®  
Thermal Server

Product Dimensions  
Height: 36.8 cm  
Width: 22.9 cm  
Depth: 28.6 cm

Empty / Filled Weight  
3.3 kg / 8.0 kg



\* Must be used with S4S Serving Stations.

## Paper Filter

#F001  
15" x 5.5" (500/Case)



## Brew Basket

#Z074  
16" x 6"  
Stainless Steel  
Brew Basket



## Information

[www.fetco.com](http://www.fetco.com)  
[international@fetco.com](mailto:international@fetco.com)

847.719.3000  
 847.719.3001

Food Equipment Technologies Company  
 600 Rose Road  
 Lake Zurich, IL 60047-0429  
 USA