


SETUP


- 1. Install on a clean and dry surface.**
Allow no less than 5 centimetres of space from all sides.
- 2. Plug the power cord into an electrical outlet.**
- 3. Connect the beverage tube to DRNX SLM by pushing the elbow fitting into the connection underneath the machine.**
Tilt the machine slightly if you need to. If you need to release the beverage tube, push the metal spring next to the connection underneath.
- 4. Place Drip Tray beneath the spout.**



WARNING: If you do not use the pre-filter, the following problem may occur:

Blockage in the machine due to large coffee particles.
Make sure all tubes are pushed firmly in place.

CONNECT TO CONTAINER

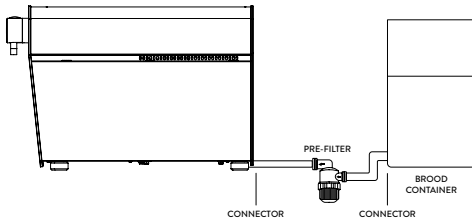


Connecting to the designated BROOD container.

1. Pour your beverage into the designated container.
Close the lid and push the seal.
2. Push one of the elbow fittings into the connector at the bottom of the container. And push the other fitting into the connector at the bottom of the machine.
3. Make sure the arrow at the base of the pre-filter is pointing in the direction of the flow.




CAUTION:
Beverage container must be level with, or beneath the machine. Otherwise the spout will drip.




Connecting to any container.

1. Pour your beverage in any container.
2. Push the elbow fitting into the connector at the bottom of the machine.
3. Drop the loose end of your beverage tube into the container containing your beverage.
4. Make sure the arrow at the base of the pre-filter is pointing in the direction of the flow.

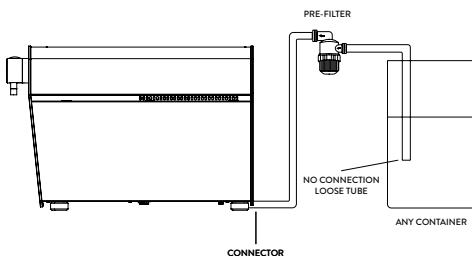

CAUTION:
Beverage container must be level with, or beneath the machine. Otherwise the spout will drip.



DRNX SLM will pull from any container. If using a keg, then attach your beverage tube to a keg coupler. If using a bag-in box, then attach your beverage tube to a bag-in-box adaptor.



WARNING: Liquid containing solid matter cannot be used.

WARNING: Never run hot liquid above 30°C (86 °F) through DRNX SLM.