

ELECTRICAL INPUT CHOOSE (ONE OF THE FOLLOWING) :

WATER INLET:


- 3/8" MALE FLARE
- 20 TO 75 PSIG,
- 1 GPM MIN. FLOW RATE

TOTAL WEIGHT
IN USE(LB/KG):
220/101.8

- 120/208-240VAC 1PH 3 WIRE+GRD 4.6-6.1KW 22.1-25.5 A
 - 120/208-240VAC 1PH 3 WIRE+GRD 6.1-8.1KW 29.3-33.8 A
 - 120/208-240VAC 3PH 4 WIRE+GRD 6.9-9.1KW 19.5-22.4 A
 - 120/208-240VAC 3PH 4 WIRE+GRD 9.1-12.1KW 25.8-29.7 A
- STEAM: 120VAC 1PH 2 WIRW+GRD 1A,
40LBS PER HOUR MAX.10-15 PSI.
EXPORT VOLTAGES ARE ALSO AVAILABLE.

CHECK ELECTRICAL SPECIFICATION LABEL FOR SPECIFIC SERVICE REQUIRED.
UTILITIES CONNECTIONS THROUGH BOTTOM AND/OR BACK WALL OF UNIT.

ELECTRIC INPUT AND WATER CONNECTION
FROM REAR

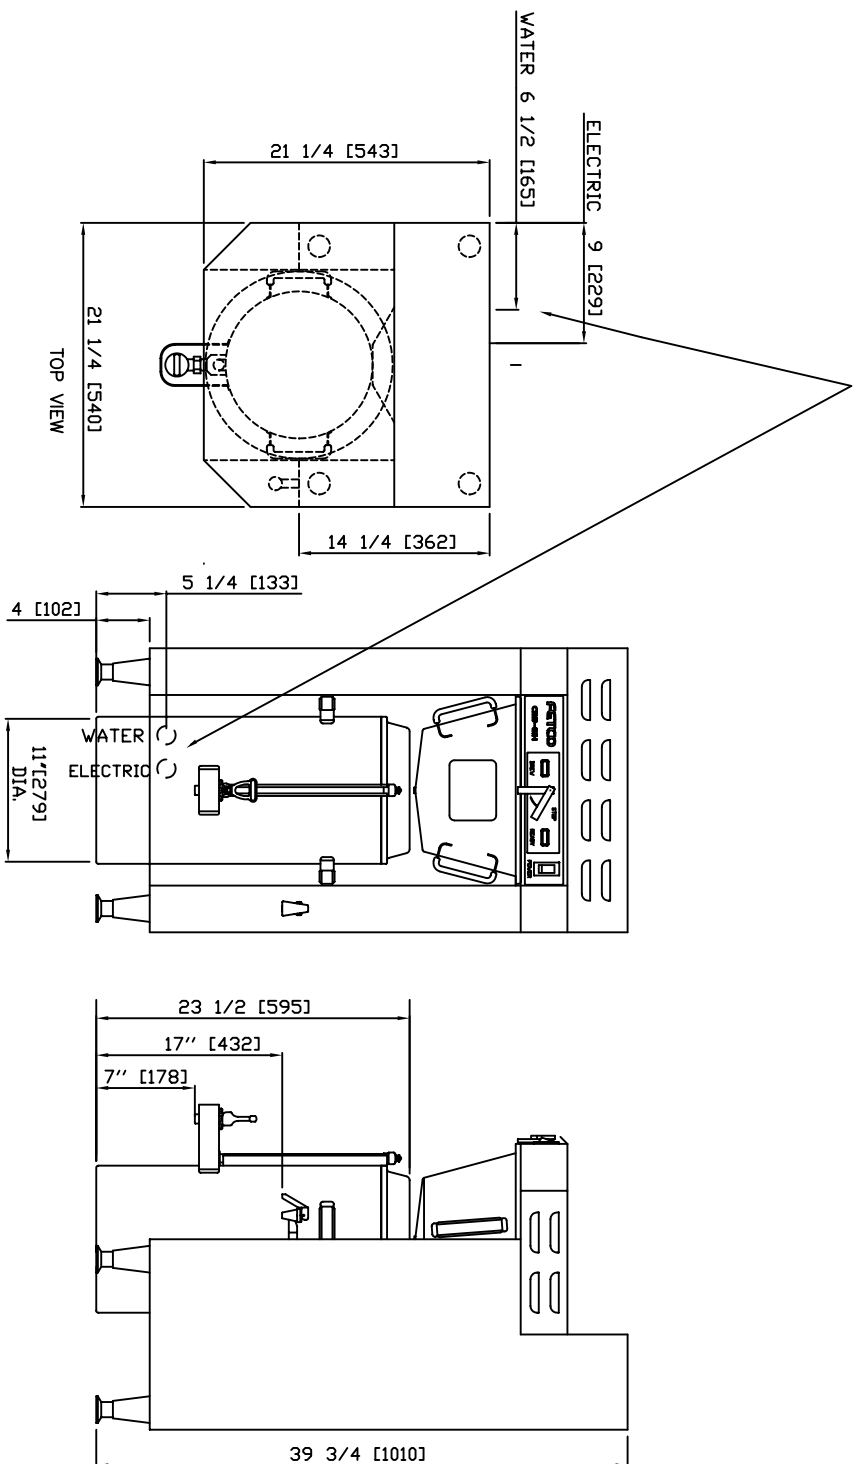

FETCD

640 HEATHROW DRIVE, LINCOLNSHIRE, IL. 60069, TEL: (800) FETCD-99

SCALE: 1:15

MODEL: CBS-61H

ROUGHING-IN SPECIFICATION

DRW. NO.

201025-000

SCALE: 1:15