

TEA BREWING SYSTEMS TBS-2121XTS Tea Brewer

Shown with ITD-2135 14.0 Liter Iced Tea Dispensers



TOUCHSCREEN SIMPLICITY

A simple touch is all it takes to experience full control over the brew cycle.

FUNCTIONAL DESIGN

XIS

New features and exclusive designs provide an extraordinary tea service experience for both operators and consumers.



EXTRACTOR TOUCHSCREEN™

FEATURES

Brew flavorful and refreshing teas with the TBS-2121XTS Twin 14.0 Liter Tea Brewer from FETCO. Precision brew controls, modern style and expert craftsmanship come together to provide a versatile beverage solution for the operator and an extraordinary taste experience for their customers.

The TBS-2121XTS Twin 14.0 Liter Touchscreen Tea Brewer combines the simplicity of a touchscreen with new features like the innovative "intelligent" brew basket for quick, efficient operation and producing flavorful taste profiles from your teas.



USER FRIENDLY OPERATION

Access all controls via an inviting touchscreen interface display that blends intuitive icons with dynamic time and volume data.

Efficiently navigate set-up, programming, diagnostics and daily brewing modes.

Customize the start screen to tie your equipment and product offerings into a consistent brand message.



EXTRACT, BREW AND STEEP

FETCO's patented Cascading Spray Dome water delivery system provides excellent coverage for loose leaf or prepackaged tea and will never clog!

Dual dilution spouts positioned above the container dispense water directly from the inlet. The right-side spout can also deliver liquid sweetener (if so equipped).

Program the exact steep time for precise control over flavor extraction.



CONTEMPORARY STYLE

Modern European style elevates your iced tea service with an attractive, inviting self-serve atmosphere.



INTELLIGENT BREW BASKETS

Brew side sensors automatically detect which side brewing will occur. Adjustable orifice and filter screen system comes with seven different orifice sizes for optimum flavor tuning.



EXPANDABLE BASE

Expandable Dispenser Base with front-to-back guide rails keep dispensers properly aligned with brew basket. Optional dispenser station add-on platforms are available in single and dual sizes for the right amount of dispenser space you need.



SPACE SAVINGS Slim profile dispensers can be filled and placed in any area to make an instant serving station.



CONFIGURATIONS



COFFEE AND TEA VERSATILITY WITH THE TBS SHELF ACCESSORY

The #Z071 Conversion Kit allows you to take advantage of the full range of brewing



Brew directly into the 4.0 Liter Airpots with the adjustable height Universal TBS Shelf (all sold separately).



Brew directly into the 1.0 Gallon L4S-10 Server with the adjustable height Universal TBS Shelf (both sold separately).



Brew directly into the 1.0 Gallon L4D-10 Dispenser with the adjustable height Universal TBS Flat Base (both sold separately).

NOTE: Shelf is not compatible with non-XTS tea brewer.



DISPENSERS

TBS-2121 Tea Brewer

DISPENSERS



SERVING STATION FOR THERMAL SERVERS



All dispensers and serving stations SOLD SEPARATELY.

DISPENSER PLATFORMS

1102.00197.00

13" x 14" Add-On Dispenser Platform with Guide Rails for ITD-2135 Dispensers



1102.00205.00 13" x 14"

Universal Dispenser Platform with Flat Surface



1102.00202.00

7.5" x 14.5" Add-On Dispenser Platform with Guide Rails for ITD-2135 Dispensers



1102.00206.00

7.5" x 14.5" Universal Dispenser Platform with Flat Surface



ADDITIONAL


1023.00052.00

Liner Replacement for Dispenser

ACCESSORIES

TBS-2121 Tea Brewer

BASKETS AND FILTERS

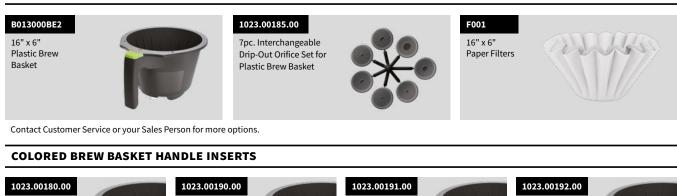

Green Insert

CONVERSION KIT

Blue Insert



WATER FILTRATION SYSTEM

Filtration System	SKU Part		Rated Capacity	Working Pressure	Weight
Everpure®	A039	In-Line System	113,563 liters	10-125 psi [0.7-8.6 bar], non-shock	6.0 lbs / 2.7 kg
Everpure®	A075	Replacement Cartridge	113,563 liters	10-125 psi [0.7-8.6 bar], non-shock	6.0 lbs / 2.7 kg
BWT Bestmax	A138	In-Line System	3,002 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A139	Replacement Cartridge	3,002 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A140	In-Line System	4,562 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A141	Replacement Cartridge	4,562 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg

BWT BESTMAX

Filtration System

In-Line Water

EVERPURE®

In-Line Water Filtration System



Red Insert

SET INCLUDES: 1ea. commercial quality corrosion resistant filter head 1ea. taste and odor filter cartridge (FETCO® #A075) / 1ea. 3/8" x 4' connection hose / 1 set — mounting bracket and hardware.

- Recommended for large-sized operations
- Taste and odor filter for extremely turbid (cloudy) water
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head inlcudes built-in shutoff valve

SET INCLUDES: 1ea. filter cartridge / 1ea. universal filter head / 1ea. wall mounting bracket Braided hose supplies 3/8" and 3/4" compression, in 24" or 48" lengths

Orange Insert

- Recommended for small- to medium-sized operations
- Carbonate hardness removal prevents scale deposits and retains minerals
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head inlcudes built-in shutoff valve
- Four bypass settings allows for different water qualities and product preferences

TECHNICAL SPECIFICATIONS

TBS-2121 Tea Brewer

ELECTRICAL										
Brewer SKU	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification	
NORTH AMERICA										
T212101	120	1 x 1.7 kW	1	2+G	1.7	NEMA 5-15P/5-20P-C ³	14.0	12.0 / 46.0	🕼 :(!).us	
T212102	200-240	1 x 2.3 kW	1	2+G	2.3	NEMA 5-15P/5-20P-C ³	9.5-11.5	12.0 / 46.0	(1) : (1) us	
T2121111	120	1 x 1.7 kW	1	2+G	1.8	NEMA 5-15P/5-20P-C ³	14.5	12.0 / 46.0	KSD c (k) us	
INTERNATIONAL										
T212161 ²	200-240	1 x 3.2 kW	1	L / N / PE	2.98	CEE 7/7	13.0	12.0 / 46.0	ⓑ (€	

WATER		CUPS PER HOUR						
Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]	Cup size	8 [oz] / 236 [ml]	12 [oz] / 355 [ml]	16 [oz] / 473 [ml]	20 [oz] / 591 [ml]
1/4" Male Flare	20-75 / 1.37-5.17	1.0/3.8	2.66 / 10.07	No. Cups per hour ²	228	192	144	115

DIMENSIONS						WEIGHT				
	Height (A)	Width (B)	Width (C)	Depth (D)	Depth (E)	Brew Basket Clearance (F)		Empty [lbs] / [kg] without infusion pump with infusion pump	Filled [lbs] / [kg] without infusion pump with infusion pump	
Product Dimensions	34.00" 86.40 cm	9.25" 22.90 cm	14.0" 35.56 cm	18.125" 43.18 cm	22.00" 55.88 cm	23.375" 59.40 cm	Product Weight	35 lbs / 15.9 kg 40 lbs / 18.1 kg	44 lbs / 20.0 kg 60 / 27.2 kg	
Shipping Dimensions	27.00" 68.60 cm	11.50" 29.20 cm	N/A	39.00" 99.06 cm	N/A	N/A	Shipping Weight	46 lbs / 20.9 kg 51 lbs / 23.1 kg	N/A	



1 With Liquid Sweetener Infusion Pump, available in US market only.

2 Based on standard factory settings: 5.5 minute brew time; 0% prewet; 93°C water.

3 Sold with factory cord and plug.



© Copyright 2023 FETCO° is a mark of Food Equipment Technologies Company.

Dispensers, airpots, paper filters, water filters, stands, accessories and options sold separately Rev. 1.0 2023.02.18 Digital Letter **FAX** +1.847.719.3001