



# 8.0 LITER COFFEE BREWING SYSTEM

## CBS-2150 TOUCHSCREEN SERIES



**CBS-2152-2GXTS**  
Twin Station Brewer\*

\* Shown with L4D-20 Luxus® Dispenser (sold separately)

The 8.0 Liter CBS-2152XTS-2G Touchscreen Series Coffee Brewers provide flexibility in medium-to-large sized venues such as Banquet Halls, Cafeterias and Restaurants. Simplify your daily operations and experience total control of this fully featured Extractor® Brewing System via an inviting touchscreen interface display that is intuitive, easy to read and simple to navigate.



### User Friendly Touchscreen

Access all controls via a touchscreen interface display to provide instant visual feedback during programming, diagnostics or the brew cycle.



### Cascading Spray Dome™

Hot tank water flows over clog-free channels built into the dome and virtually eliminates spray head scale buildup.



### Legendary Extractor® Control

Take your coffee to its peak level by unlocking the full freshness, aroma and flavor of your taste profile.



### Energy Efficient Design

Superior tank insulation and patented heat recovery method allow you to lower overall energy costs.

## Water Specification

Water Inlet 3/8" male flare fitting	Minimum Flow Rate 5.7 lpm	Water Pressure 20-75 psig [138-517 kPa]
--	------------------------------	--

## Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Liter / Hour
<b>NORTH AMERICA</b>								
E215351	2 x 3.0 kW	208-240	1 <sup>(2)</sup>	2+G	4.6-6.1	Hardwired	22.4-25.8	58.0 <sup>(1)</sup>
	3 x 3.0 kW	208-240	3	3+G	6.9-9.1	Hardwired	19.5-22.5	85.2 <sup>(1)</sup>
E215352	2 x 5.0 kW	208-240	1 <sup>(2)</sup>	2+G	7.6-10.1	Hardwired	26.9-42.5	95.8 <sup>(1)</sup>
	3 x 5.0 kW	208-240	3	3+G	11.4-15.1	Hardwired	32.0-36.9	145.0 <sup>(1)</sup>
<b>INTERNATIONAL</b>								
E215390	3 x 3.0 kW	220-240/380-415	3	4+G	9.1	Hardwired	11.8-12.9	85.0 <sup>(1)</sup>
E215391	3 x 5.0 kW	220-240/380-415	3	4+G	15.1	Hardwired	19.5-21.4	145.0 <sup>(1)</sup>
E215392	2 x 3.0 kW	208-240	1	2+G	4.6-6.1	Hardwired	22.4-25.8	58.0 <sup>(1)</sup>
E215394	3 x 5.0 kW	208-240	1	2+G	7.6-10.1	Hardwired	36.9-42.5	97.0 <sup>(1)</sup>
E215396	3 x 4.0 kW	240-415	3	4+G	12.1	Hardwired	17.1	99.0-113.0 <sup>(1)</sup>
<b>JAPAN</b>								
E215380	3 x 3.0 kW	200	3	3+G	6.5	Hardwired	18.6	64.0 <sup>(1)</sup>
<b>CE</b>								
E215361	3 x 3.0 kW	230/400	3	3L / N / PE	8.6	Hardwired	12.4	85.0 <sup>(1)</sup>
E215362	3 x 5.0 kW	230/400	3	3L / N / PE	14.1	Hardwired	20.4	145.0 <sup>(1)</sup>

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 93°C water. 2 gallons per batch.  
 (2) 1 or 3 phase configuration is field selectable by user. Sold factory configured for single phase 2 wire plus ground.

## Measurements

**Product Dimensions**  
 Height: 98.6 cm  
 Width: 55.2 cm  
 Depth: 57.7 cm


**Empty / Filled Weight**  
 37.0 kg / 81.6 kg

**Combined Filled Weight**  
 106.3 kg  
BREWER + 1 FILLED D063 DISPENSER

**Hot Water Tank Capacity**  
 43.7 l

**Shipping Dimensions**  
 Height: 94.0 cm  
 Width: 68.6 cm  
 Depth: 56.0 cm

**Shipping Weight**  
 96 lbs [43.5 kg]

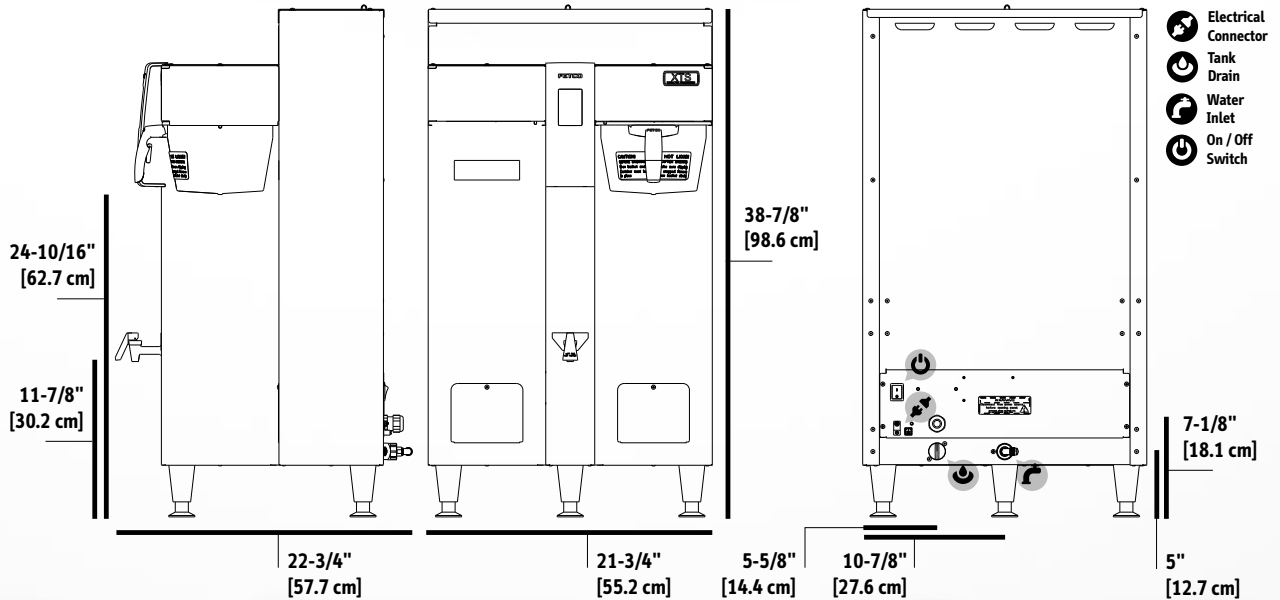

## Compatible Dispensers

#D450\*  
L4D-20  
8.0 Liter LUXUS®  
Thermal Dispenser

#D453\*  
L4S-20  
8.0 Liter LUXUS®  
Thermal Server

\* Must be used with S4S Serving Stations.

## Customize Your Brewer

#A150  
S4S-15/20-1  
Single Serving Station  
for L4S-15/20 Server

#A152  
S3S-15/20-3  
Triple Serving Station  
for L4S-15/20 Server

#A151  
S3S-15/20-2  
Twin Serving Station  
for L4S-15/20 Server

## Paper Filter

#F001  
15" x 5.5" (500/Case)  
Standard Paper  
Coffee Filter

## Brew Basket

#Z074  
16" x 6"  
Stainless Steel  
Brew Basket

## Information

www.fetco.com

847.719.3000

Food Equipment Technologies Company  
 600 Rose Road  
 Lake Zurich, IL 60047-0429  
 USA

international@fetco.com

847.719.3001