

HANDLE OPERATED COFFEE BREWER

CBS-5000 Series

CBS-52H-15

Twin 6.0 Liter Brewer



The CBS-5000 Series was designed for simplicity. The Handle Operated Series brewers save the operator time and effort by delivering quick and consistent results from your pre-programmed coffee recipe. It is the reliable choice for serving high-volumes of single batch coffee all day long.



Handle operation — a quick start!

Simply twist the handle to begin the brew cycle and in minutes your perfectly brewed coffee is ready to serve.



Manual water faucet.

Safely dispense hot water away from steam and brew basket.



Set it and forget it.

Program your recipe once and this brewer delivers consistent and repeatable results.

* Shown with 6.0 Liter LUXUS® Thermal Dispensers (L4D-15)

FETCO®
TRUSTED | RELIABLE | QUALITY

Water Specification

Water Inlet
3/8" male flare fitting

Minimum Flow Rate
1 1/4 gpm [4.71 lpm]

Water Pressure
20-75 psig [138-517 kPa]


Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Liter/Hour
NORTH AMERICA								
C52016	2 x 3.0 kW	120/208-240	1	3+G	4.6-6.1	Terminal Block	22.0-25.4	39.7-56.8 ⁽¹⁾
C52026	2 x 4.0 kW	120/208-240	1	3+G	6.1-8.1	Terminal Block	29.3-33.8	56.8-73.8 ⁽¹⁾
C52036 ⁽²⁾	3 x 3.0 kW	120/208-240	3	4+G	7.0-9.1	Terminal Block	19.5-22.4	62.5-85.2 ⁽¹⁾
C52046 ⁽²⁾	3 x 4.0 kW	120/208-240	3	4+G	9.1-12.1	Terminal Block	25.6-29.6	85.2-113.6 ⁽¹⁾
C52186 ⁽²⁾	3 x 4.0 kW	440-480	3	3+G	10.3-12.1	Terminal Block	13.6-14.8	85.2-113.6 ⁽¹⁾
INTERNATIONAL								
C52076 ⁽²⁾	3 x 3.0 kW	220-240/380-415	3	4+G	7.8-9.1	Terminal Block	11.8-12.9	73.8-85.2 ⁽¹⁾
C52086 ⁽²⁾	3 x 4.0 kW	220-240/380-415	3	4+G	10.3-12.1	Terminal Block	15.7-17.1	96.5-113.6 ⁽¹⁾
C52096	2 x 3.0 kW	220-240	1	2+G	5.1-6.1	Terminal Block	23.3-24.4	51.1-56.8 ⁽¹⁾
C52106	2 x 4.0 kW	220-240	1	2+G	6.8-8.1	Terminal Block	30.9-33.8	68.1-73.8 ⁽¹⁾

(1) Based on standard factory settings: 4.0 minute brew time; 0% prewet; 93°C water.
(2) Requires 3 phase Electrical Power System (Z056).

Measurements

Height	Width	Depth	Empty Weight	Filled Weight	Shipping Weight	Shipping Dimensions:
36" [91.4 cm]	21" [53.3 cm]	16" [40.6 cm]	82 lbs [37.2 kg]	145 lbs [65.8 kg]	100 lbs [45.4 kg]	35" x 23" x 23" [88.9 x 58.4 x 58.4 cm]

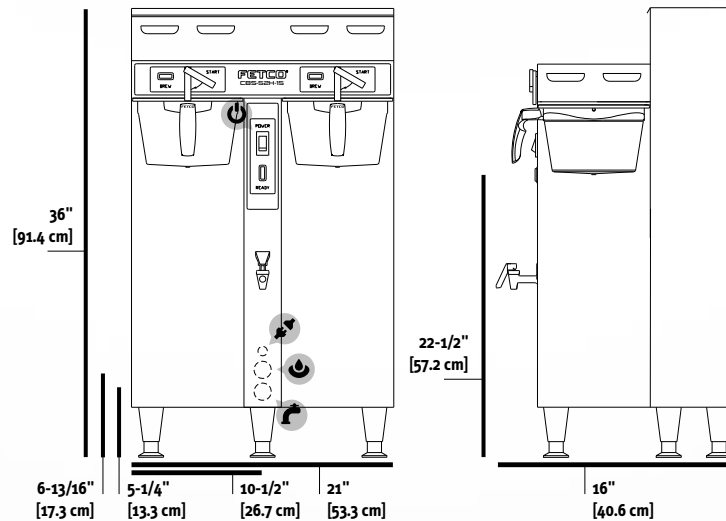

- Electrical Connector
- Tank Drain
- Water Inlet
- On / Off Switch



Compatible Dispensers

- 6.0 Liter LUXUS® Thermal Server (L4S-15)
Must be used with S4S Serving Stations.
- 6.0 Liter LUXUS® Thermal Dispenser (L4D-15)
- 6.0 Liter LUXUS® Portable Thermal Dispenser (TPD-15)

D452
D449
D009

Customize Your Brewer

- Single Serving Station for L4S-15/20 Server A150
- Twin Serving Station for L4S-15/20 Server A151
- Triple Serving Station for L4S-15/20 Server A152
- Identifier Plates, Acrylic A069
- Hot Tea Infuser (1.5 Gallon Size) A113
- Drip Tray - Square A137

Paper Coffee Filters

15" x 5.5" (500/Case)

F001

Information

www.fetco.com

847.719.3000

Food Equipment Technologies Company
600 Rose Road
Lake Zurich, IL 60047-0429
USA

international@fetco.com

847.719.3001