

ELECTRICAL INPUT CHOOSE ONE OF THE FOLLOWING :

- 120/208-240VAC 3 PH 4WIRE+GRD 11.6-15.3KW 33.7-38.6 A.
- 120/208-240VAC 3 PH 4WIRE+GRD 22.8-30.3KW 65.0-74.7 A.
- 120/480VAC 3 PH 4WIRE+GRD 30.3KW 37.9A.
- 120/208-240VAC 3 PH 4WIRE+GRD 22.8-30.3KW 65.0-74.7 A.
- 120/408VAC 3 PH 4WIRE+GRD 60.3KW 74.7A.

STEAM:

- 160LBS PER HOUR MAX.10-15 PSI 1/2" LINE
- 120VAC 1PH 2 WIRE+GRD 2.5A
- 160LBS PER HOUR MAX.10-15 PSI 3/4" LINE
- 120VAC 1PH 2 WIRE+GRD 2.5A
- 80LBS PER HOUR MAX. EACH SIDE 10-15 PSI (TWID) 1/2" LINE
- 120VAC 1PH 2 WIRE+GRD 2.5A


CHECK ELECTRICAL SPECIFICATION LABEL FOR SPECIFIC SERVICE REQUIRED.

UTILITIES CONNECTIONS THROUGH BOTTOM AND/OR BACK WALL OF UNIT.

WATER INLET: 3/8" MALE FLARE
1.5 GPM FLOW RATE

TOTAL WEIGHT IN USE(LBS/KG): 720/327.3

ELECTRIC INPUT AND WATER CONNECTION FROM REAR

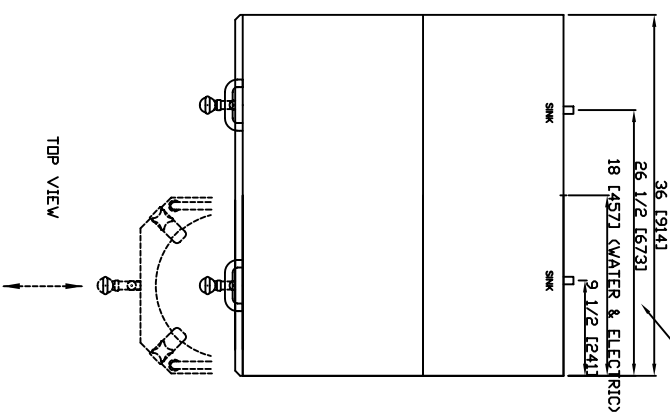

TOP VIEW

