

COFFEE BREWING SYSTEMS

CBS-1260 Plus Brewers 3.0-3.5 GALLON BREWING SYSTEM

Shown with D012 12.0L / 3.0G LUXUS® Thermal Dispenser



PLUG AND PLAY OPERATION

Batch buttons are pre-programmed at the factory. If desired the USB port can be used to upload and download recipes.



CASCADING SPRAY DOME

Patented design provides even saturation of the coffee bed for maximum extraction. Lime resistant design for less service calls.

DISPENSERS

CBS-1260 Plus Brewers

DISPENSERS

D012

12.0 Liter / 3.0 Gallon
LUXUS® Thermal
Dispenser
TPD-30



All dispensers **SOLD SEPARATELY.**



BREW BASKET DESIGN

Advanced brew basket design provides a deeper bed depth and superior thermal insulation for better extraction.



CONTEMPORARY DESIGN

Traditional FETCO core with modern design enhancements fits well in any front-of-house or back of the house application.



ECO MODE

Reduces tank temperature during periods of non-operation.

ACCESSORIES

CBS-1260 Plus Brewers

BREW BASKETS AND PAPER FILTERS

Brewer SKU	Brew Basket	Coffee Capacity	Filter Size	Filter SKU	Filter/Case
All configurations	Stainless Steel	Up to 32oz / 907g	20" x 8"	F004	500/cs
All configurations	Stainless Steel	Up to 20oz / 567g	18" x 7"	F005	500/cs

B00828004

21" x 7"
Stainless Steel
Brew Basket



B00828005

21" x 7"
Stainless Steel
Brew Basket
with Clips


F004

20" x 8"
Paper Filters



F005

18" x 7"
Paper Filters



Contact Customer Service or your Sales Person for more options.

WATER FILTRATION SYSTEM

Filtration System	SKU	Part	Rated Capacity	Working Pressure	Weight
Everpure®	A039	In-Line System	113,563 liters	10-125 psi [0.7-8.6 bar], non-shock	6.0 lbs / 2.7 kg
Everpure®	A075	Replacement Cartridge	113,563 liters	10-125 psi [0.7-8.6 bar], non-shock	6.0 lbs / 2.7 kg
BWT Bestmax	A138	In-Line System	3,002 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A139	Replacement Cartridge	3,002 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A140	In-Line System	4,562 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A141	Replacement Cartridge	4,562 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg

EVERPURE®

In-Line Water
Filtration System



SET INCLUDES: 1ea. commercial quality corrosion resistant filter head 1ea. taste and odor filter cartridge (FETCO® #A075) / 1ea. 3/8" x 4' connection hose / 1 set — mounting bracket and hardware.

- Recommended for large-sized operations
- Taste and odor filter for extremely turbid (cloudy) water
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head includes built-in shutoff valve

BWT BESTMAX

In-Line Water
Filtration System



SET INCLUDES: 1ea. filter cartridge / 1ea. universal filter head / 1ea. wall mounting bracket Braided hose supplies 3/8" and 3/4" compression, in 24" or 48" lengths



- Recommended for small- to medium-sized operations
- Carbonate hardness removal prevents scale deposits and retains minerals
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head includes built-in shutoff valve
- Four bypass settings allows for different water qualities and product preferences

TECHNICAL SPECIFICATIONS

NORTH AMERICA

CBS-1261 Plus Brewer

ELECTRICAL

Brewer SKU	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1261US-UB230-MM110 DUAL PHASE	208-240	2 x 3.0 kW	1	2+G	4.5-6.0	Terminal Block	22.2-25.5	15.9 / 60.4	 
	208-240	3 x 3.0 kW	3	3+G	6.8-9.0	Terminal Block	19.3-22.2	23.9 / 90.6	

WATER









Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	1.50 / 5.68	8.63 / 32.67

CUPS PER HOUR

Cup size	8 [oz] / 236 [ml]	12 [oz] / 355 [ml]	16 [oz] / 473 [ml]	20 [oz] / 591 [ml]
No. Cups per hour ²	383	255	192	153

CBS-1262 Plus Brewer

ELECTRICAL

Brewer SKU	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1262US-3B330-MM110	208-240	3 x 3.0 kW	3	3+G	6.8-9.0	Terminal Block	19.3-22.2	23.9 / 90.6	 
E1262US-3B630-MM110	208-240	6 x 3.0 kW	3	3+G	13.5-18.0	Terminal Block	38.0-43.8	47.8 / 181.3	 
E1262US-3B340-MM110	208-240	3 x 4.0 kW	3	3+G	9.0-12.0	Terminal Block	25.5-29.4	31.9 / 120.8	 
E1262US-3B640-MM110	208	6 x 4.0 kW	3	3+G	18.0	Terminal Block	50.5	47.8 / 181.3	 

WATER

Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	3.00 / 11.36	15.86 / 60.04

CUPS PER HOUR

Cup size	8 [oz] / 236 [ml]	12 [oz] / 355 [ml]	16 [oz] / 473 [ml]	20 [oz] / 591 [ml]
No. Cups per hour ²	766	511	383	306

1 This version is made to order and it might require longer production lead time. Please ask your local sales representative for more information.







2 Based on standard (factory) settings: 6.0 minute brew time (0% prewet; 93°C water), DT=140°F, 3 gallon per batch.

TECHNICAL SPECIFICATIONS

INTERNATIONAL

CBS-1261 Plus Brewer

ELECTRICAL

Brewer SKU	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1261IN-3B330-MM110	220/380-240/415	3 x 3.0 kW	3	3L/N/G	7.6-9.0	Terminal Block	12.0-12.9	23.9 / 90.6	NSF 
E1261IN-3B340-MM110	220/380-240/415	3 x 4.0 kW	3	3L/N/G	10.1-12.0	Terminal Block	15.8-17.2	30.0 / 113.7	NSF 
E1261IN-3B350-MM110 ¹	220/380-240/415	3 x 5.0 kW	3	3L/N/G	12.6-15.0	Terminal Block	19.6-21.3	30.0 / 113.7	NSF 
E1261NM-3B350-MM110	208-240	3 x 5.0 kW	3	3+G	11.3-15.0	Terminal Block	31.8-36.6	30.0 / 113.7	NSF 
E1261CE-3B330-MM110	230/400	3 x 3.0 kW	3	3L/N/PE	8.3	Terminal Block	12.5	22.1 / 83.6	NSF 
E1261CE-3B340-MM110	230/400	3 x 4.0 kW	3	3L/N/PE	11.0	Terminal Block	16.5	29.2 / 110.8	NSF 

WATER






Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	1.50 / 5.68	8.63 / 32.67

CUPS PER HOUR

Cup size	8 [oz] / 236 [ml]	12 [oz] / 355 [ml]	16 [oz] / 473 [ml]	20 [oz] / 591 [ml]
No. Cups per hour ²	481	320	240	192

CBS-1262 Plus Brewer

ELECTRICAL

Brewer SKU	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1262IN-3B350-MM110 ¹	220/380-240/415	3 x 5.0 kW	3	3L/N/G	12.6-15.0	Terminal Block	19.6-21.3	39.9 / 151.1	NSF 
E1262IN-3B630-MM110	220/380-240/415	6 x 3.0 kW	3	3L/N/G	15.1-18.0	Terminal Block	23.4-25.5	47.8 / 181.3	NSF 
E1262NM-3B630-MM110	208-240	6 x 3.0 kW	3	3+G	13.5-18.0	Terminal Block	38.0-43.8	47.8 / 181.3	NSF 
E1262CE-3B340-MM110	230/400	3 x 4.0 kW	3	3L/N/PE	11.0	Terminal Block	16.5	29.2 / 110.8	NSF 
E1262CE-3B350-MM110	230/400	3 x 5.0 kW	3	3L/N/PE	13.8	Terminal Block	20.5	36.7 / 139.0	NSF 

WATER

Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	3.00 / 11.36	15.86 / 60.04

CUPS PER HOUR

Cup size	8 [oz] / 236 [ml]	12 [oz] / 355 [ml]	16 [oz] / 473 [ml]	20 [oz] / 591 [ml]
No. Cups per hour ²	766	511	383	306

1 This version is made to order and it might require longer production lead time. Please ask your local sales representative for more information.

2 Based on standard (factory) settings: 6.0 minute brew time (0% prewet; 93°C water), DT=140°F, 3 gallon per batch.


DIMENSIONS

CBS-1261 Plus Brewer

DIMENSIONS							WEIGHT		
	Height (A)	Width (B)	Depth (D)	Depth (E)	Brew Basket Clearance (F)	Faucet Clearance (G)		Empty [lbs] / [kg]	Filled [lbs] / [kg]
Product Dimensions	41.38" 105.11 cm	17.88" 45.42 cm	27.50" 69.85 cm	22.25" 56.52 cm	23.88" 60.66 cm	12.13" 30.80 cm	Product Weight	88 lbs 39.9 kg	160 lbs 72.6 kg
Shipping Dimensions	39.0" 99.06 cm	23.0" 58.42 cm	28.0" 71.72 cm	N/A	N/A	N/A	Shipping Weight	97 lbs 44.0 kg	N/A

CBS-1262 Plus Brewer

DIMENSIONS							WEIGHT		
	Height (A)	Width (C)	Depth (D)	Depth (E)	Brew Basket Clearance (F)	Faucet Clearance (G)		Empty [lbs] / [kg]	Filled [lbs] / [kg]
Product Dimensions	41.38" 105.11 cm	32.0" 81.28 cm	27.50" 69.85 cm	22.25" 56.52 cm	23.88" 60.66 cm	12.13" 30.80 cm	Product Weight	130 lbs 59.0 kg	266 lbs 120.7 kg
Shipping Dimensions	39.0" 99.06 cm	37.0" 93.98 cm	29.0" 73.66 cm	N/A	N/A	N/A	Shipping Weight	140 lbs 63.5 kg	N/A

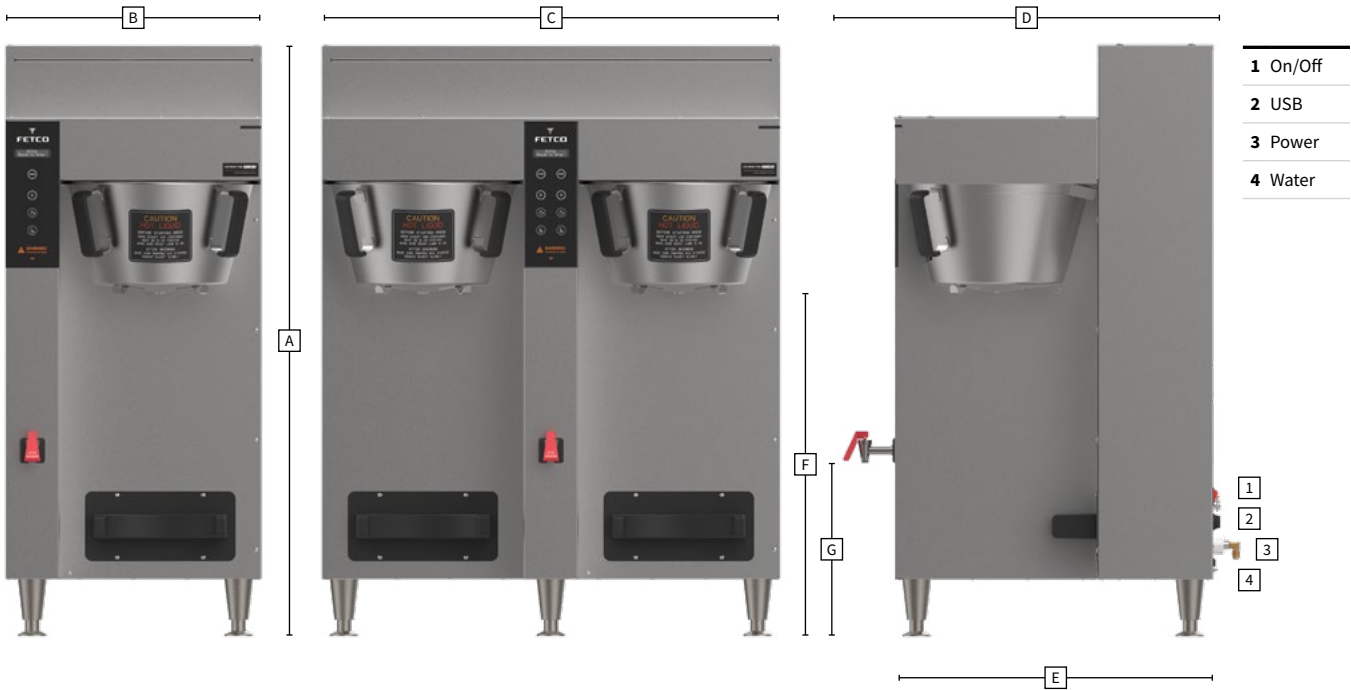

FAX
+1.847.719.3001